

DS-KV6113-WPE1(B) Video Intercom Villa Door Station



- Support Wifi (Only available in DS-KV6113-WPE1 model), convenient setting up and no wiring required
- Support web configuration
- Nice industry design, IP65, 2 indicator integrated;
- Internal M1 card reader, 1-ch Indoor station access control;
- Noise suppression and echo cancellation
- 2 MP HD Camera with IR supplement
- Standard PoE/ 12 VDC


▪ Specification

System parameters	
Operating system	Embedded Linux operation system
ROM	16 M, 32 M
RAM	256 M
CPU	Embedded MCU Processor
Display parameters	
Screen size	/
Operation method	/
Type	/
Resolution	/
Video parameters	
Lens	1
Resolution	Main stream: 1920 × 1080p, 720p Sub stream: 704 × 576
FOV	Horizontal: 129° Vertical: 75°
WDR	True WDR
Supplement light	IR supplement
Video compression standard	H.264
Audio parameters	
Audio compression standard	G.711 U
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
User capacity	/
Face capacity	/
Card capacity	/
Linked network camera capacity	1
Network parameters	
Communication protocol	TCP/IP, RTSP
Wired network	10/100 Mbps self-adaptive Ethernet
Wi-Fi standard	Support
Bluetooth version	Not supported.
3G/4G standard	/
Received frequency	2.4 to 2.4835GHz
Transmitted frequency	2.4 to 2.4835 GHz
Bandwidth	20 to 40 MHz
Frequency power	802.11b:16dBm +/- 1.5dBm 802.11g:15dBm +/- 1.5dBm 802.11n(ht20):14dBm +/- 1.5dBm 802.11n(ht40):12dBm +/- 1.5dBm

Device interfaces	
Alarm input	4
Network interface	1
TAMPER	1
Exit button	1
RS-485	1
USB	0
Wiegand	0
TF card	0
Alarm output	0
Lock control	1
Door contact input	1
Power interface	1
Performances	
Multi-factor authentication	2000
General	
Button	1
Installation	Surface mounting
Indicator	2
Weight	265g
Protective level	IP65
Working temperature	-40° C to +55° C(-40° F to 131° F)
Working humidity	10% to 95%
Dimensions	138 mm × 65 mm × 27 mm
Indicator	2
Battery	/
Application environment	Outdoor
Power consumption	< 10 W
Language	English, French, Portuguese (Brazil), Spanish, Russian, German, Italian, Polish, Arabic, Turkish, Vietnamese, Hungarian, Dutch, Romanian, Czech, Bulgarian, Ukrainian, Croatian, Serbian

▪ Physical Interface



No.	Description	No.	Description
1	Microphone	7	Terminals
2	Camera	8	Debugging Port
3	Indicator	9	TAMPER
4	Button	10	Set Screw
5	Card Reading Area	11	TF Card Slot (Reserved)
6	Loudspeaker	12	Network Interface

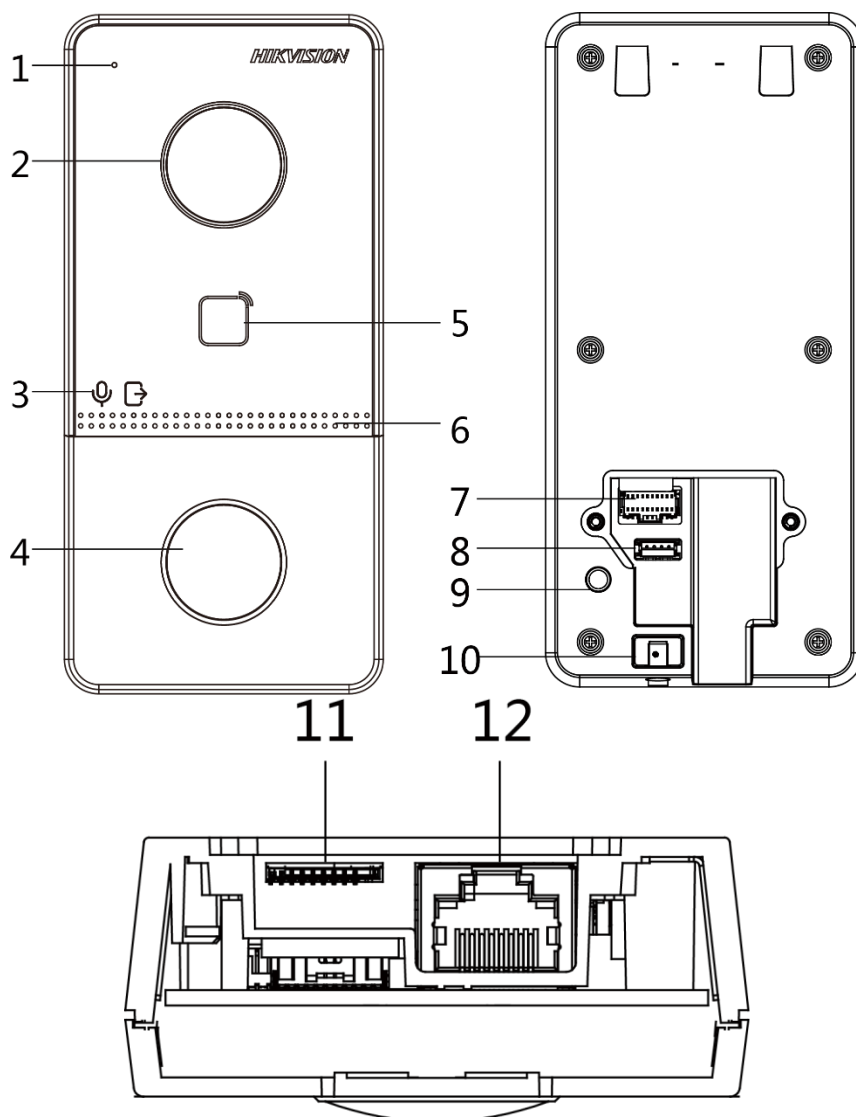

▪ **Available Model**

DS-KV6113-WPE1(B)

▪ Dimension

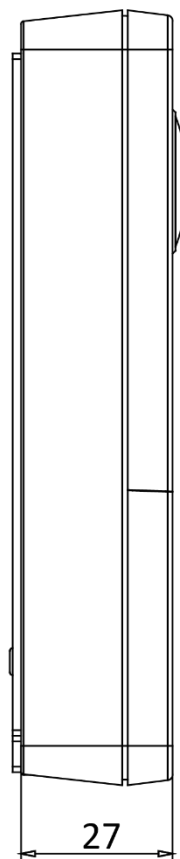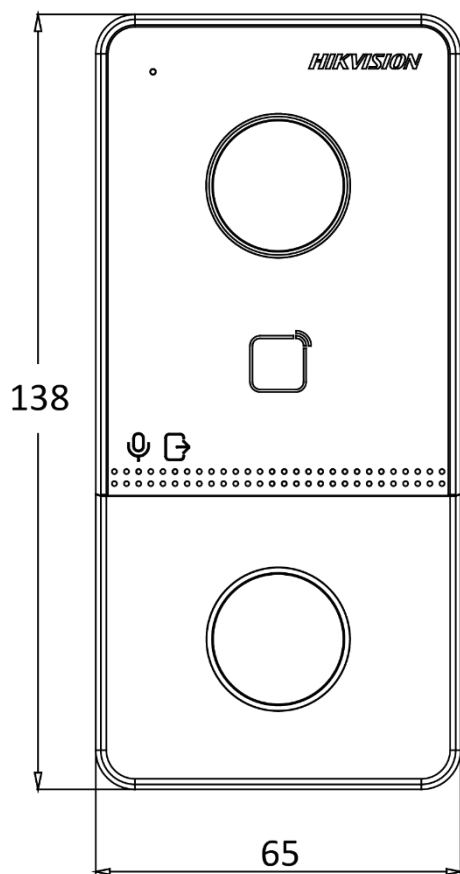

Unit:mm

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq